

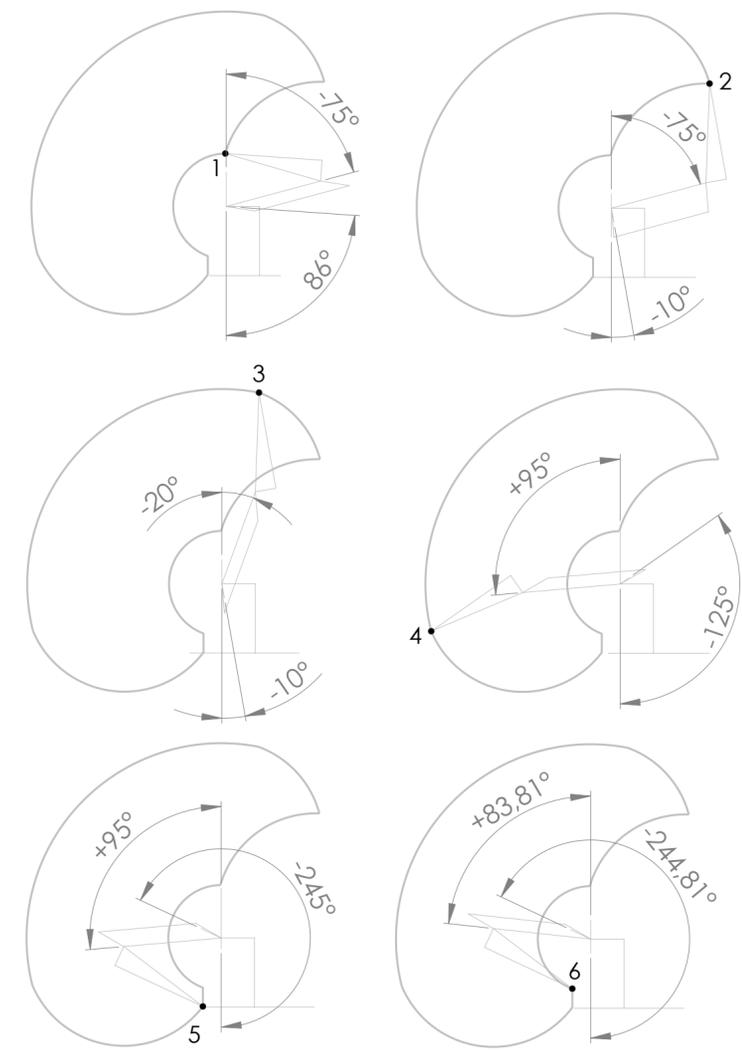
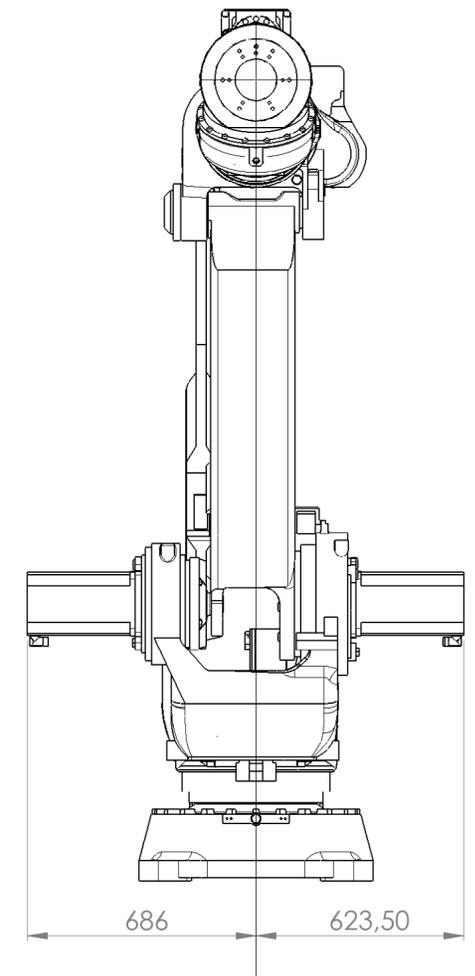
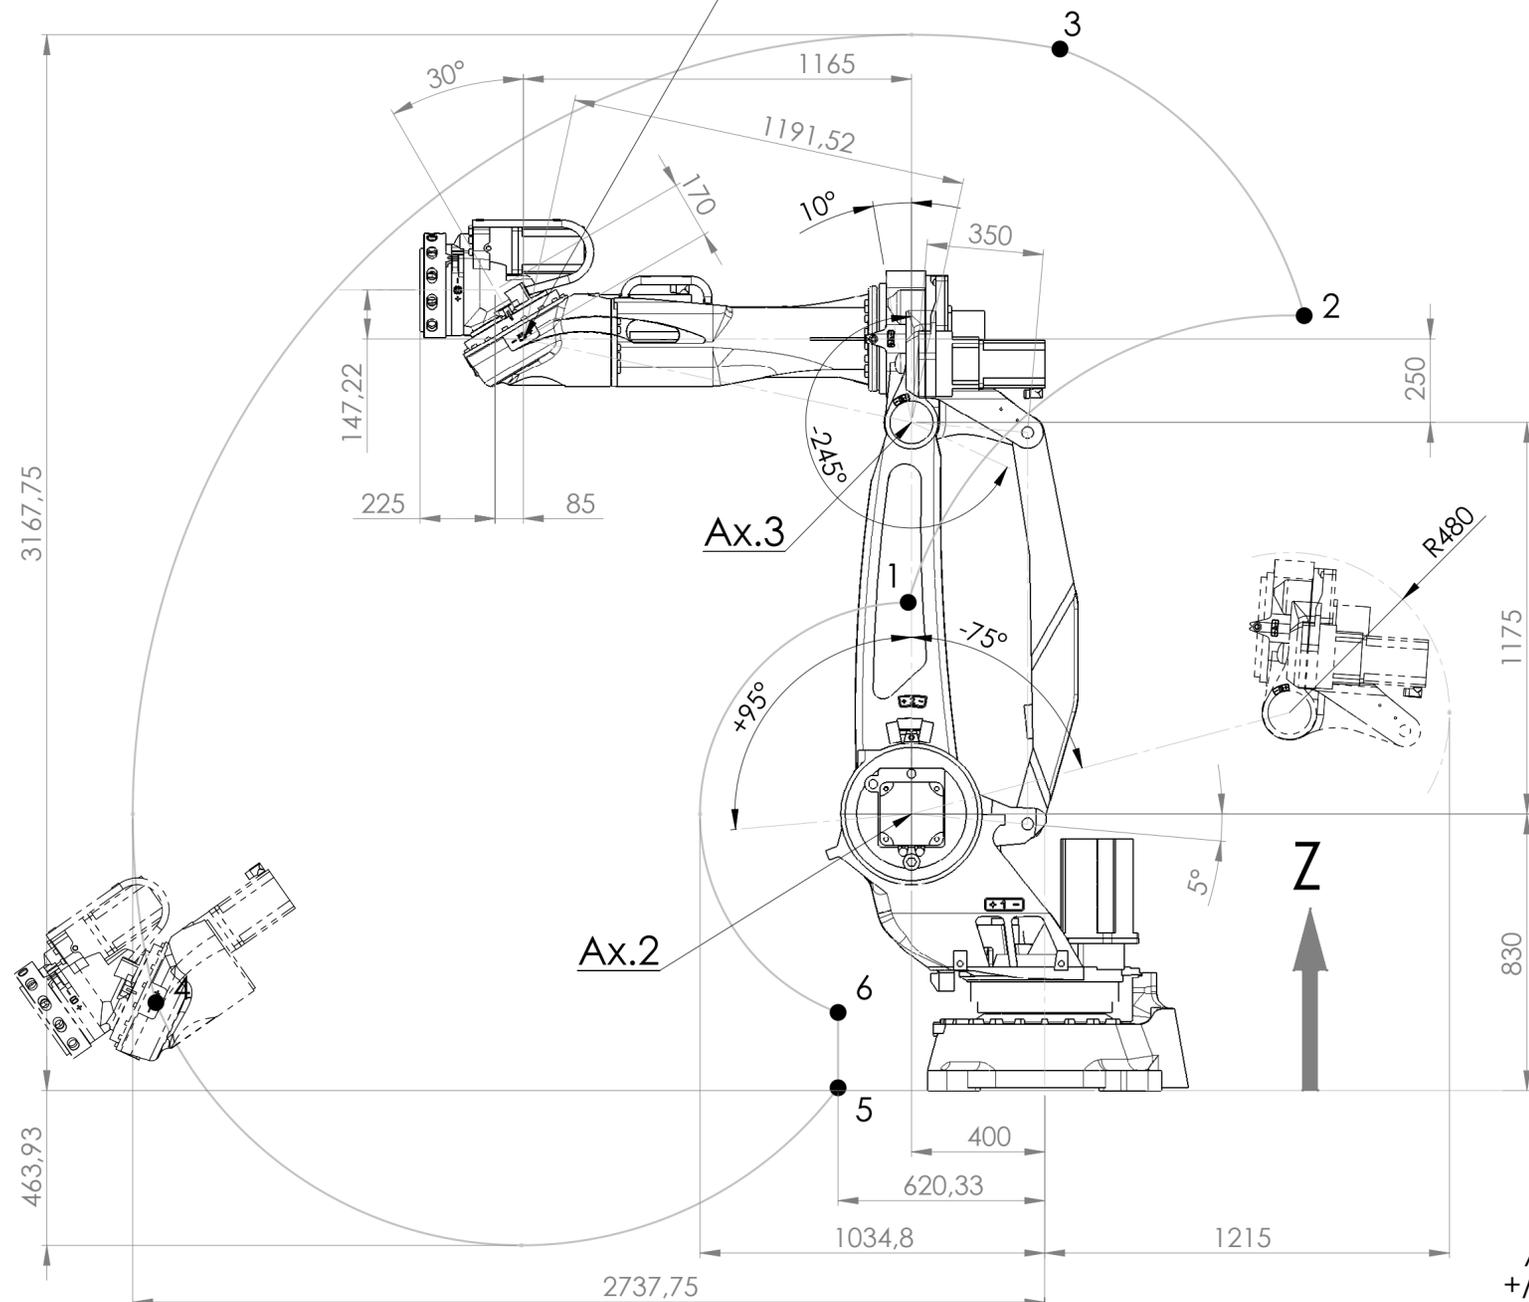
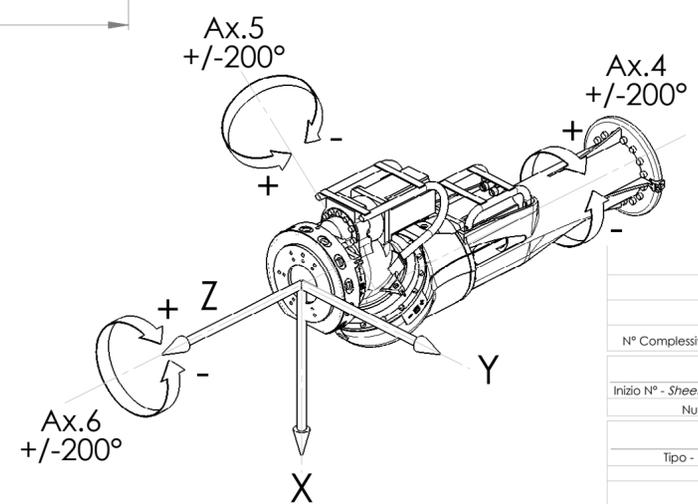


Pos.7 (Calibration Position)

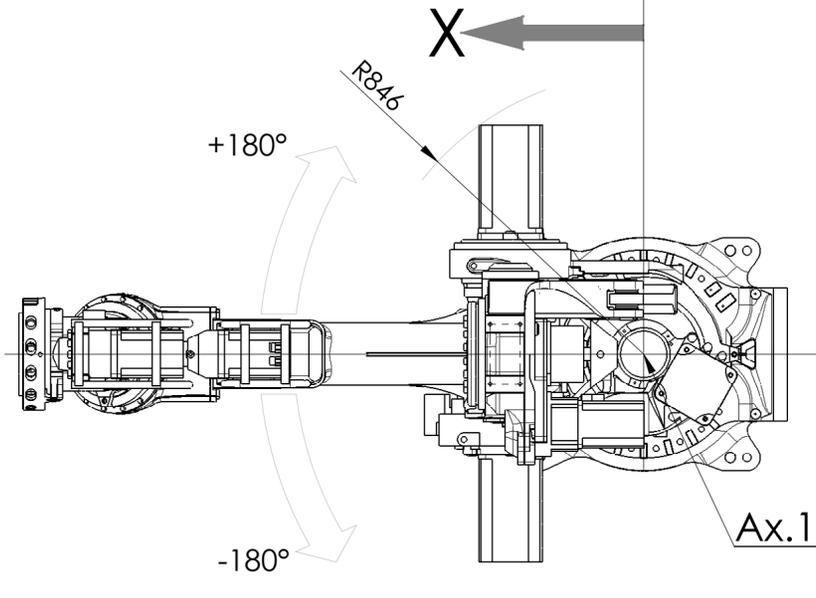

POS.	X [mm]	Z [mm]	AX.2 [deg]	AX.3 [deg]
1	409,76	1464,77	-75°	-86°
2	-778,86	2324,83	-75°	-10°
3	-45,78	3124,85	-20°	-10°
4	2668,24	264,16	+95°	-125°
5	620,33	-8,66	+95°	-245°
6	620,33	234,62	+83,81°	-244,81°
7	1565	2255	0°	-90°

Joints in Calibration Position (Pos.7)					
Ax.1	Ax.2	Ax.3	Ax.4	Ax.5	Ax.6
0°	0°	-90°	0°	0°	0°

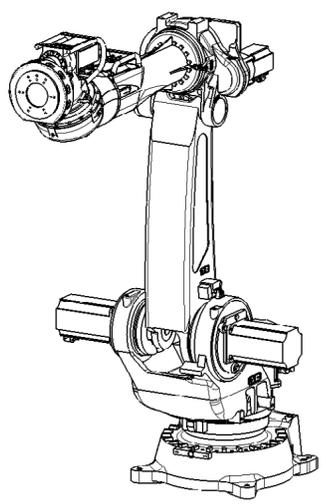

N° Complessivo - Assembly Dwgs	Quantità per Complessivo Q.ty Assembly	N° Part. Part. N°	N° -No.	Modifiche - Revisions	Data -Date Visto -Approv.
Inizio N° - Sheet first N°	Fine N° - Sheet last N°	Ultimo N° - Last used	Commissa - Job	Data - Date	Scala - Scale
Numerazione conduttori - Wires numbering			1/1	Pernechele	Amparore
Tipo - Type	Materiale - Material	Codice - Code	Foglio - Sheet	Disegn. - Drawn	Visto - Checked
Superficiale - Surface	Trattamento - Treatment	Termico - Heat	Titolo SMART-5 NJ4-220-2.7		
No.	Kg.	HRC	CR82346405		
Modello - Model	Peso - Weight	HB	N° Disegno - Drawing No.		
Quote senza indicazioni di tolleranza : ISO 2768-mK			Proprietà della COMAU S.p.A. - Senza autorizzazione scritta della stessa il presente disegno non potrà essere comunicato a terzi o riprodotto. La Società proprietaria tutela i propri diritti a rigore di legge.		
For dimensions with no tolerance : ISO 2768-mK			All proprietary rights reserved by COMAU S.p.A. This drawing shall not be reproduced or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringement will be legally pursued.		
Tolleranze generali - General tolerances			COMAU		